




RENAULT
TRUCKS

RENAULT TRUCKS

RENAULT TRUCKS E-TECH C
RENAULT TRUCKS E-TECH T
(TRACTOR)


PRODUCTION START : 2023

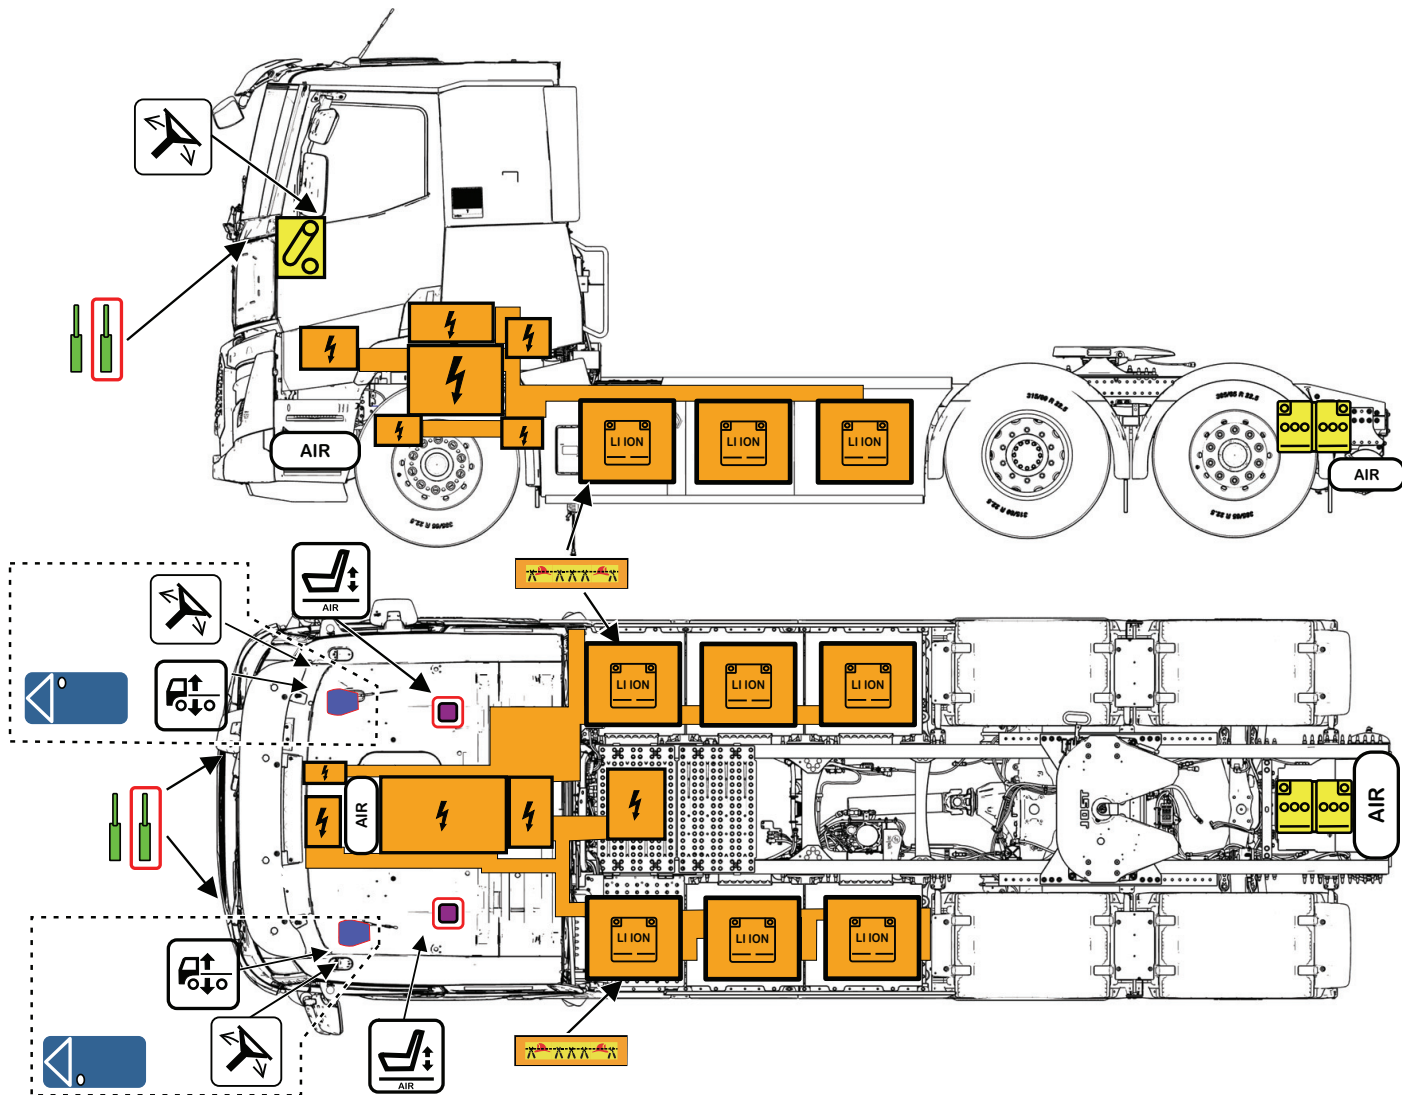

High-voltage lithium-ion battery



Emergency cut-off loop:
Cutting this cable
disconnects the high
voltage.



Low-voltage battery



Air tank



Seat adjustment



Height control




Steering wheel tilt control



High-voltage component



High-voltage cable



Gas strut, pre-loaded
spring



Starter switch



Seat belt pretensioner



Airbag

Note

- (a) The above image shows information for one variant of this product. Number of axles, cab structure and number of traction batteries can vary depend on the variant of the product.
- (b) These instructions do not cover the safety aspects of the components and equipments mounted by a third party (example: body builders).
- (c) Discrepancy may exist in the translated documents as the original document is authored in English.

Identification number
800077265

Version number
07/2023

Page number
1





RENAULT
TRUCKS

RENAULT TRUCKS

RENAULT TRUCKS E-TECH C
RENAULT TRUCKS E-TECH T
(RIGID)

PRODUCTION START : 2023

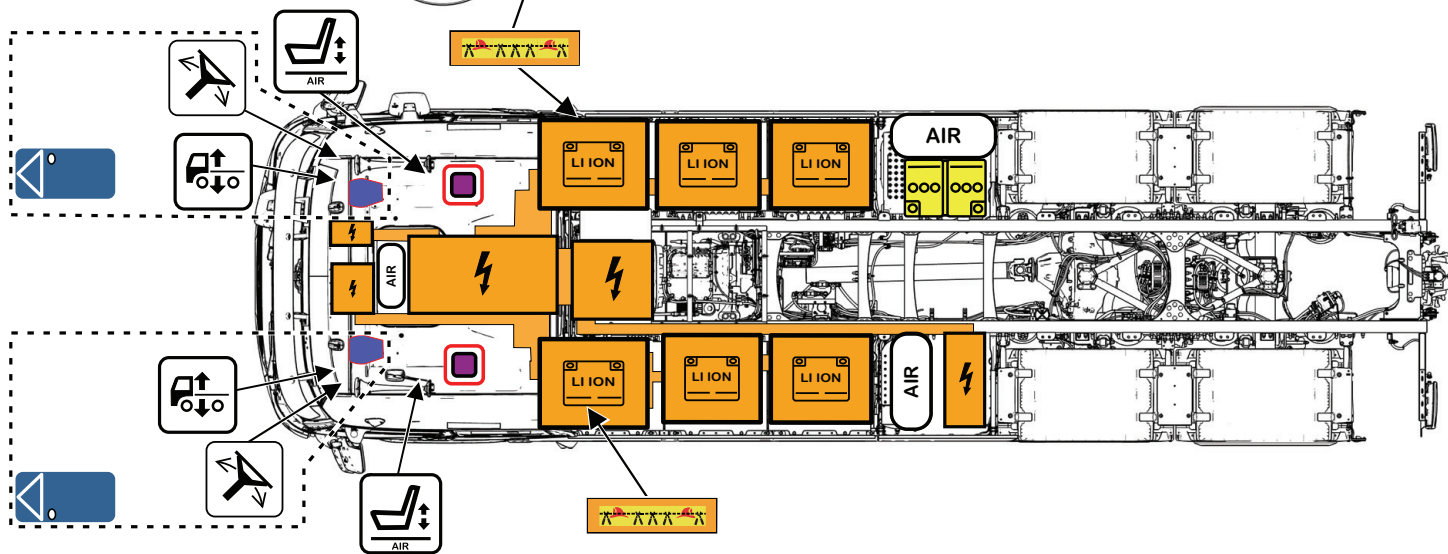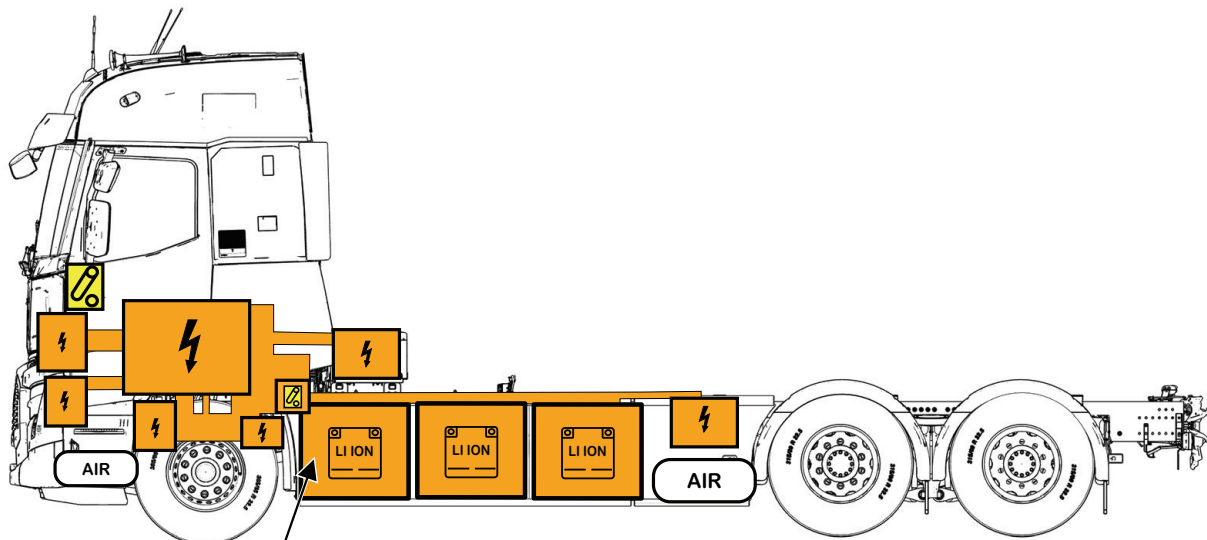

 High-voltage lithium-ion battery	 Emergency cut-off loop: Cutting this cable disconnects the high voltage.	 Low-voltage battery	 Air tank	 Seat adjustment	 Height control	 Steering wheel tilt control
 High-voltage component	 High-voltage cable	 Starter switch	 Seat belt pretensioner	 Airbag		

Note

- (a) The above image shows information for one variant of this product. Number of axes, cab structure and number of traction batteries can vary depend on the variant of the product.
- (b) These instructions do not cover the safety aspects of the components and equipments mounted by a third party (example: body builders).
- (c) Discrepancy may exist in the translated documents as the original document is authored in English.

Identification number	Version number	Page number
800077265	07/2023	2


1. Identification / recognition




2. Immobilisation / stabilisation / lifting

Always approach the electric truck from the sides to stay out of the potential travel path. Due to lack of noise it can be difficult to determine if the truck is running.

1. Chock the wheels.

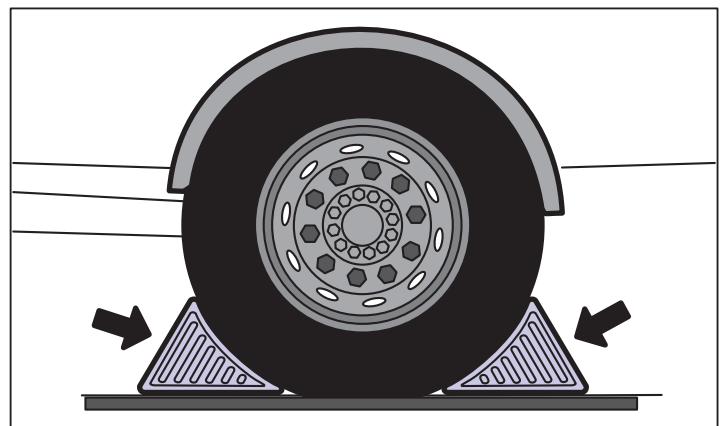


2. Apply the parking brake.

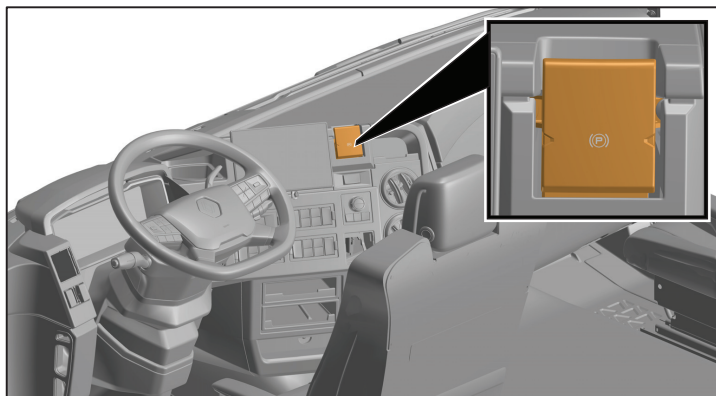


3. Disable direct hazards / safety regulations




1. If possible, check the instrument cluster for "Batteries overheating" warning. If "Batteries overheating" warning is displayed, exit the vehicle safely.

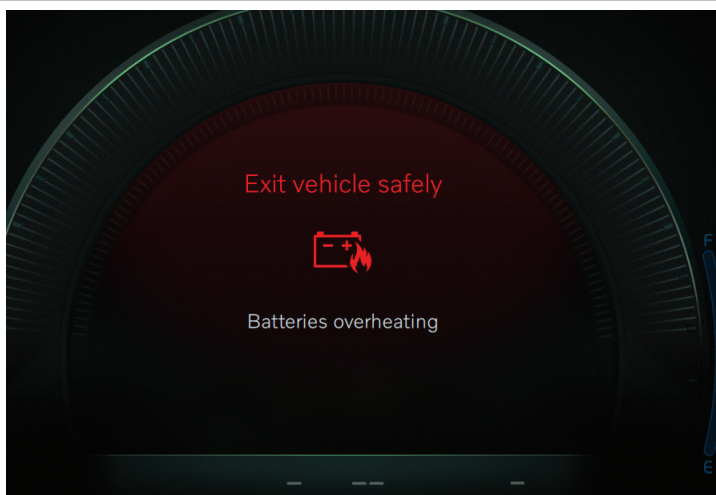



2. If possible turn off the starter switch.

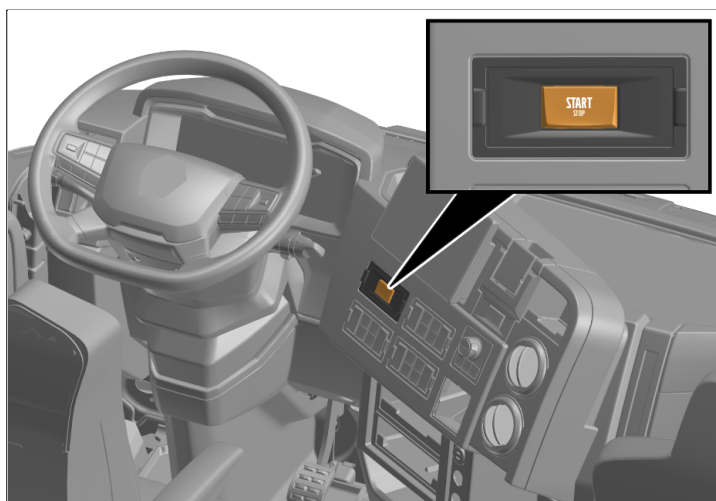

3. Remove the side marking lamp (1) using a screw driver (2).

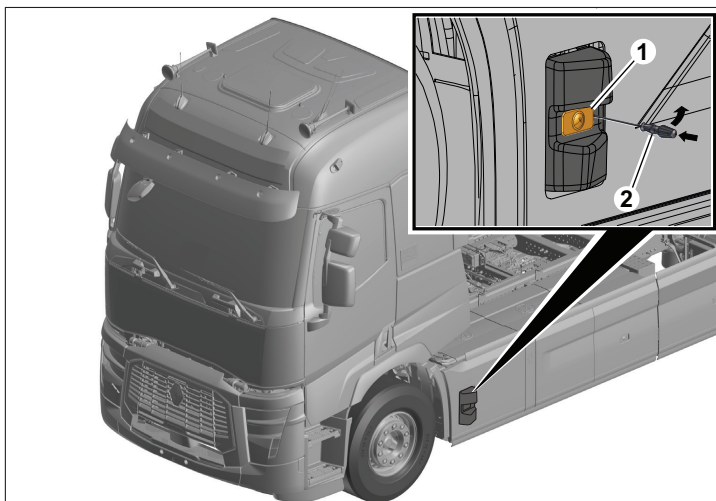


4. Locate the emergency cut-off loop (low voltage) (3) with the label (4).

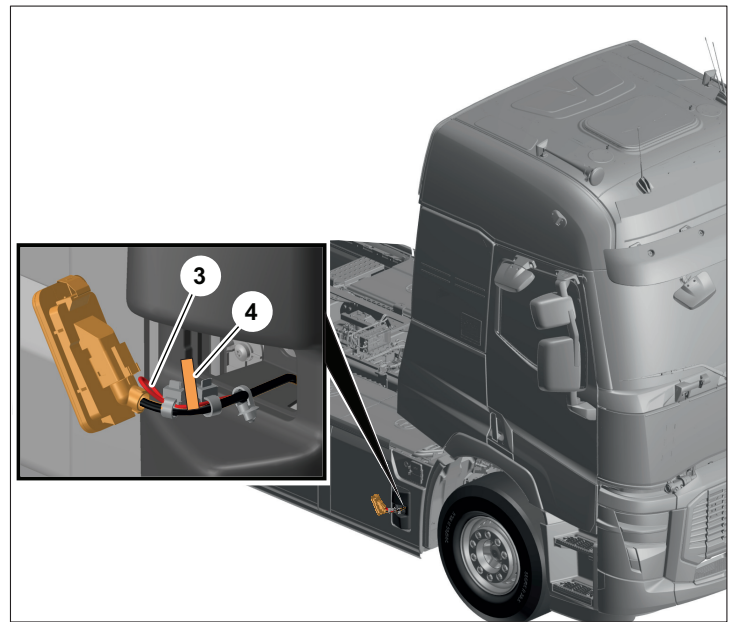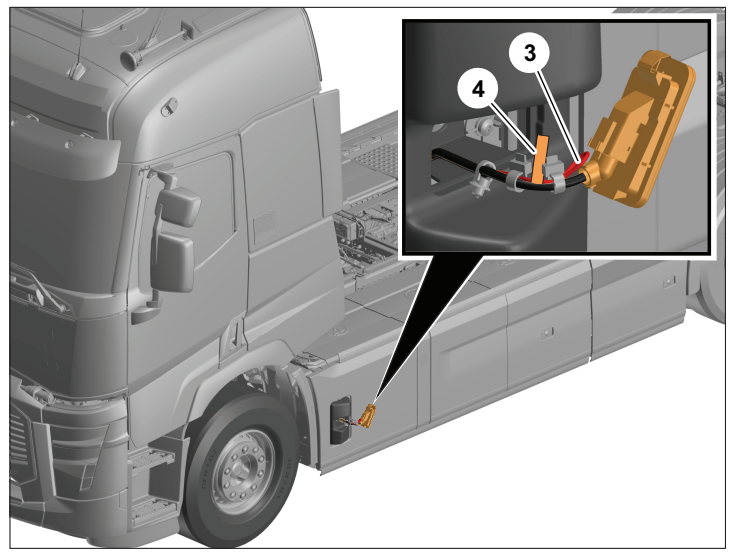


5. Cut the emergency cut-off loop on each side of the loop to initiate the high voltage disconnection process.

Note: Cutting at any of the locations shown will disable the traction voltage in the traction battery and all the high-voltage components and discharge their own capacitance within five seconds. 24 V systems like seat position adjustment and steering system will still function after cutting the cable.

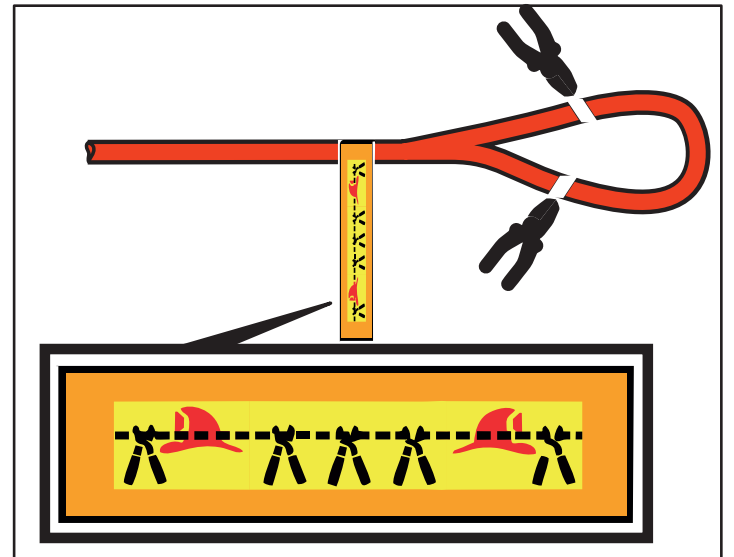


If the truck is charging

1. Unlock the cab using key fob.
2. Press the stop button (1) and wait for the steady yellow light (2) on the charging inlet.
3. Pull the charging plug (2) from the charging inlet, once the yellow light turns off.

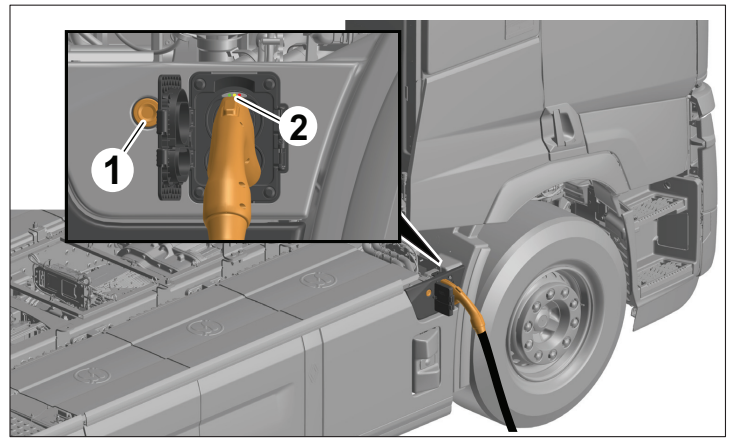

If the charging plug cannot be pulled out: retract the pin manually

1. Rotate the lever (1) and remove the charging plug (2).

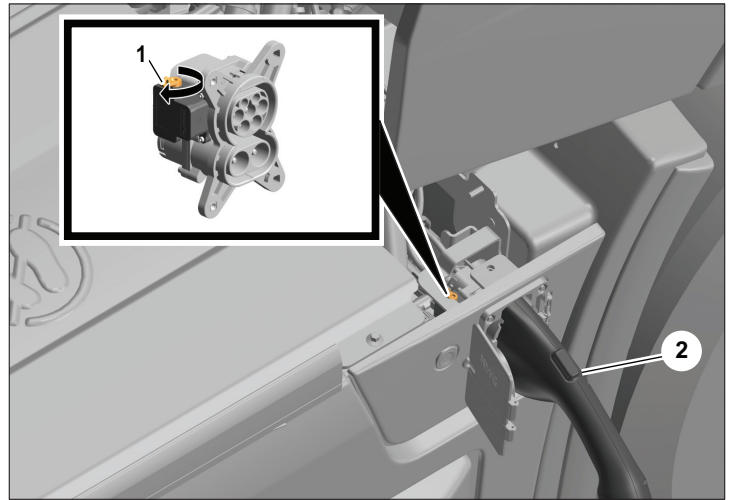

5. Stored energy / liquids / gases / solids

600 V high-voltage lithium-ion battery



It is not recommended to approach an electric vehicle during or immediately after a thermal event. Before approaching the electric truck, be aware that a delayed thermal event in lithium-ion batteries can occur.

6. In case of fire



Use a large, sustained volume of water to extinguish a lithium-ion battery-related fire.



Extinguishing a lithium-ion battery-related fire with water can produce hydrofluoric acid. Efforts should be made to control and collect run off water.



If other materials are involved, use class ABC fire extinguisher.



In case of thermal runaway, the lithium-ion batteries can release hydrogen fluoride gas.

7. In case of submersion



The degree of damage of a submerged electric truck may not be visible. Submersion in water can damage 24 V and 600 V components.

Handling an electric truck that have been submerged without an appropriate Personal Protective Equipment (PPE) may result in serious injury or death due to electric shock.

Avoid any contact with 600 V cables and electric components. If possible, disable direct hazards (Refer to “3. Disable direct hazards/safety regulations”).

8. Towing / transportation / storage



Check the condition of the lithium-ion batteries before towing. If the traction batteries are damaged, there is a risk of thermal or chemical reaction. It is recommended to take guidance from emergency response personnel before towing.




Delayed thermal event in the lithium-ion batteries can occur after they are damaged or after battery fire / heat suppression. A heat camera may be used to identify the thermal event.

To ensure the safety, it is recommended to:

- * Park the electric truck involved in an accident in a suitable place maintaining a safe distance from other vehicles, buildings, and combustible objects.
- * Perform the risk analysis based on the local situation. Observe the electric truck for the period of time decided during the risk analysis.






Before towing an electric truck with rear wheels on the ground, it is mandatory to disconnect the drive to the wheels.

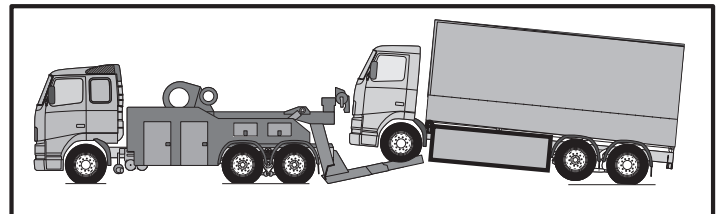

The drive to the wheels is disabled by either uncoupling the propeller shaft (1) from the driven axle (2) or by removing the drive shafts (3).

Note

Moving an electric truck with the rear wheels on the ground without disabling the drive may cause damage to the electric motor and the gearbox.

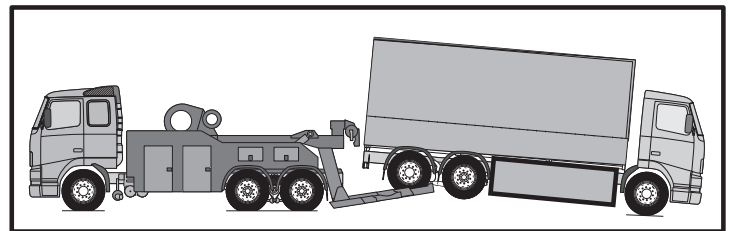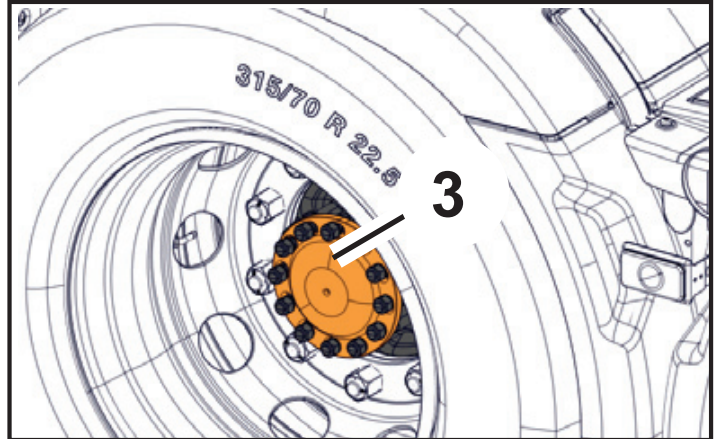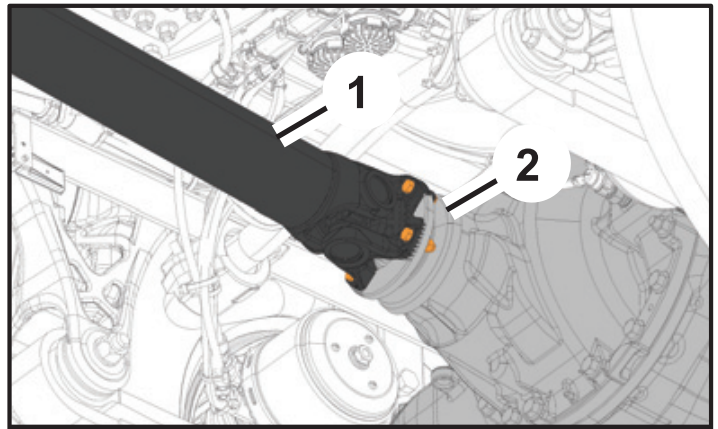

In case of a physical damage or a thermal event on the lithium-ion batteries. It is recommended to tow the electric vehicle with the rear wheels lifted.

9. Important additional information



All cables carrying high voltage are in orange colour. Do not cut any high-voltage cables.

Do not touch any high-voltage cables or electric components.

Do not perform any operation on a damaged vehicle without an appropriate Personal Protective Equipment (PPE).